


# HS-628MG General Specification.

Control System	PWM			-
Position Sensor Type	Contact Analog Potentiometer			-
Motor Type	Cored Metal Brush			-
Operating Voltage Range	4.8 ~ 6.0V			-
Voltage	4.8V	6.0V	-	-
No Load Speed	0.18sec/60°	0.15sec/60°	-	-
Stall Torque	5.5kgf·cm (76.38oz-in)	6.8kgf·cm (94.43oz-in)	-	-
Peak Efficiency Torque	1.1kgf·cm (15.28oz-in)	1.4kgf·cm (19.44oz-in)	-	-
Standing Current	9mA	9mA	-	-
No Load Running Current	400mA	500mA	-	-
Stall Current	-	-	-	-
Deadband	8μs	8μs	-	-
Operating Travel	Default: ±60°, Non-programmable / Pulse Width: 900~2100μs(Center:1500μs)			-
Continuous Rotation	n/a			-
Operating Temperature Range	-20°C ~ +60°C (-4°F ~ +140°F)			-
Storage Temperature Range	-30°C ~ +80°C (-22°F ~ +176°F)			-
Connector Wire Length	300mm(11.811inch)			
Connector Wire Gauge	22AWG			
Dimensions	40.6mm x 19.8mm x 37.8mm (1.598inch x 0.780inch x 1.488inch)			General Tolerance ±0.1mm
Weight	n/a1.947oz			Excluding the weight of Horn
Bearing Type	2 Ball Bearing			-
Case Material	Engineering Plastic			-
Gear Material	1 Metal + Plastic & 3 Metal Gears			-
Gear Train Backlash	Max 0.5°			-
Horn Gear Spline	25T(Ø6)			-
IP-Rating	IP4X			-
Servo Amplifier Type	Analog Controller			-

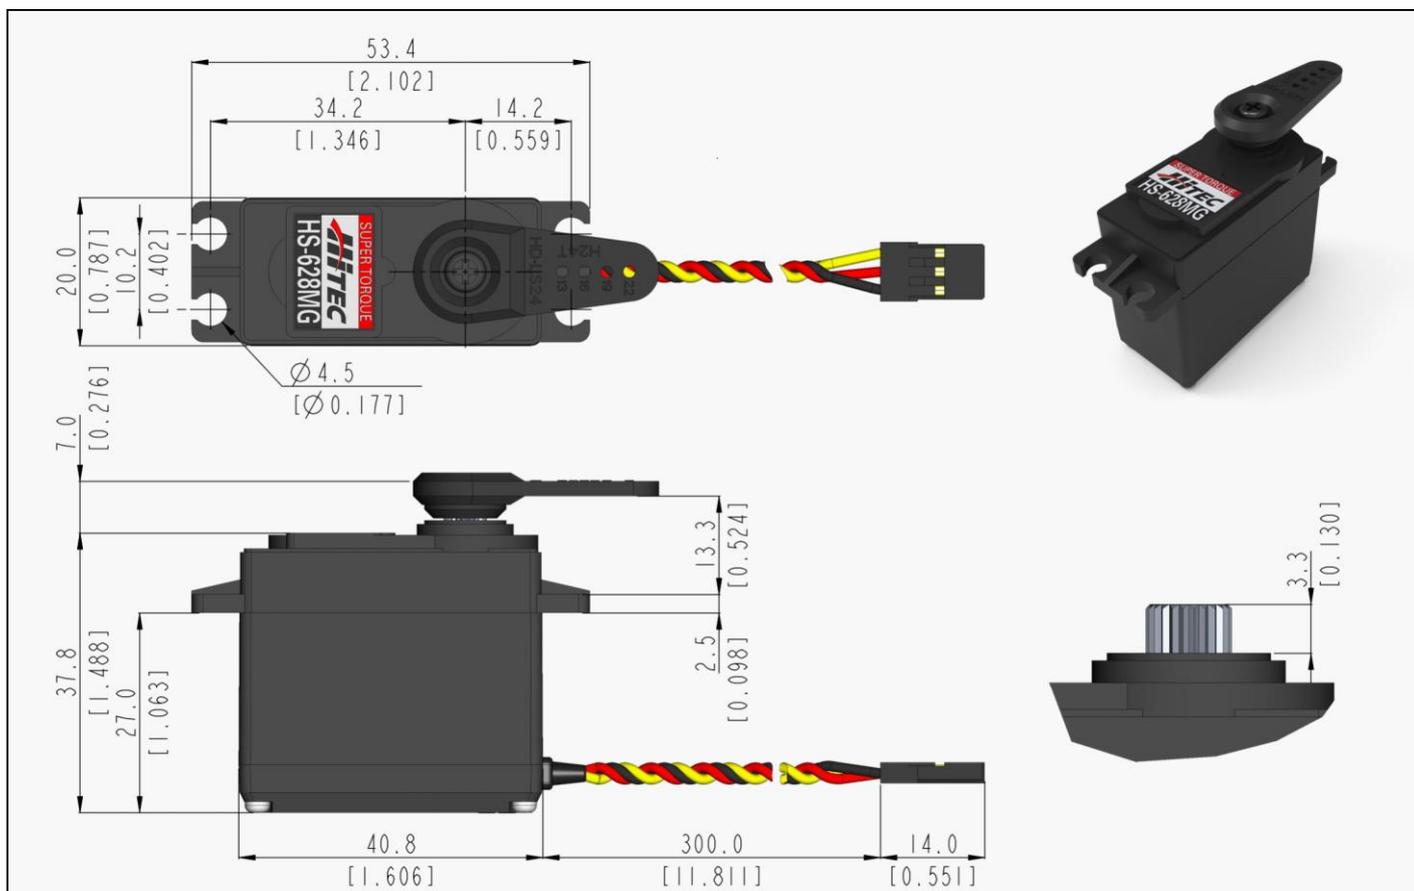

1:1 scale (Unit : mm[inch])

- This product should not be used directly on the human body for medical purposes.
- All specifications are subject to change without notice.

